



# BZX584C2V4 THRU BZX584C75V

## Zener Diode

### Features

### Mechanical Data

Package  
Terminals

Polarity:

### Maximum Ratings

°C

)

PARAMETER	SYMBOL	UNIT	VALUE
°C			

SODE

Q







ss









# BZX584C2V4 THRU BZX584C75V

## Characteristics

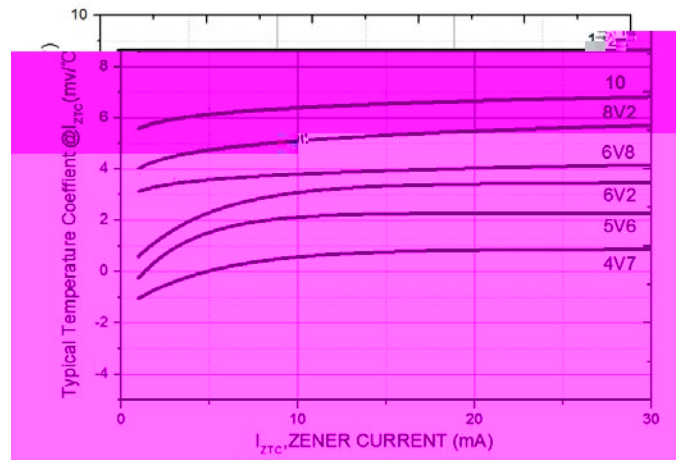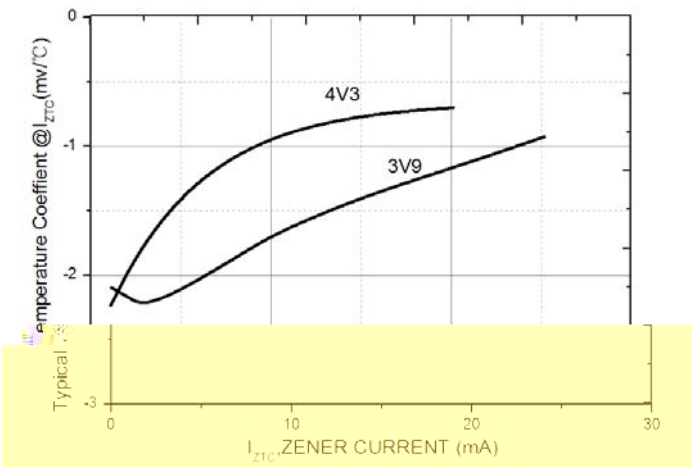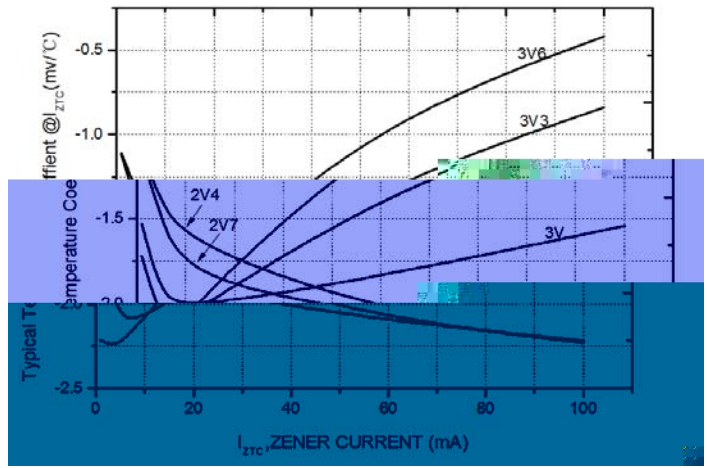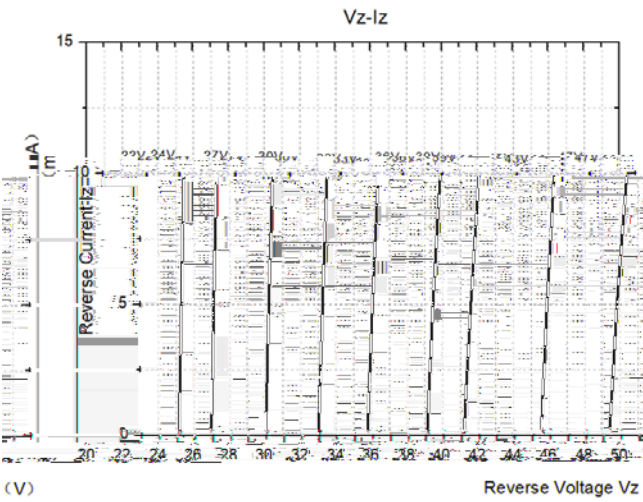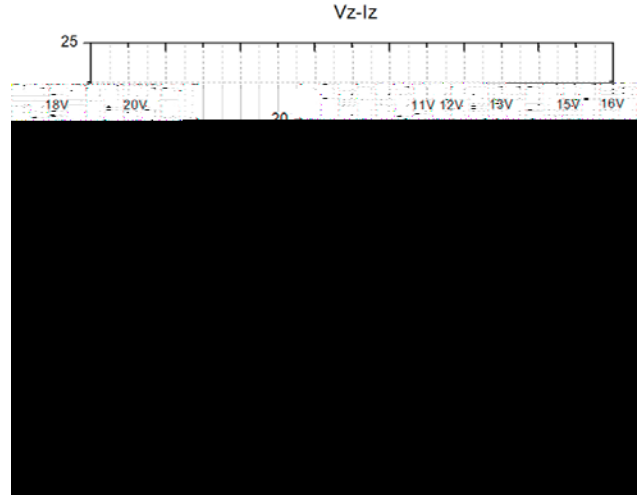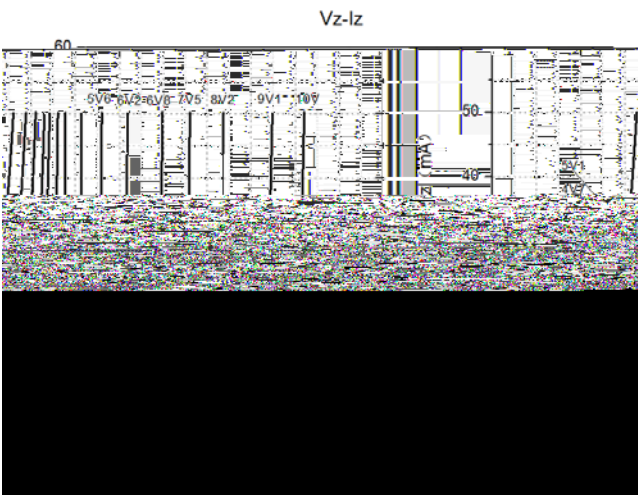



# BZX584C2V4 THRU BZX584C75V

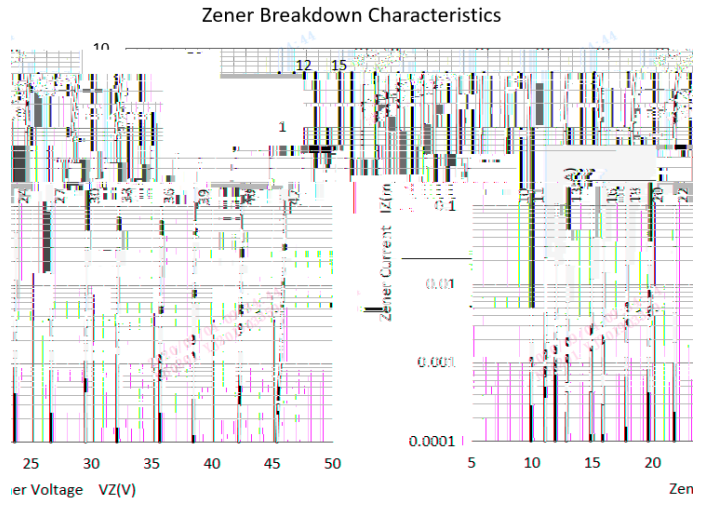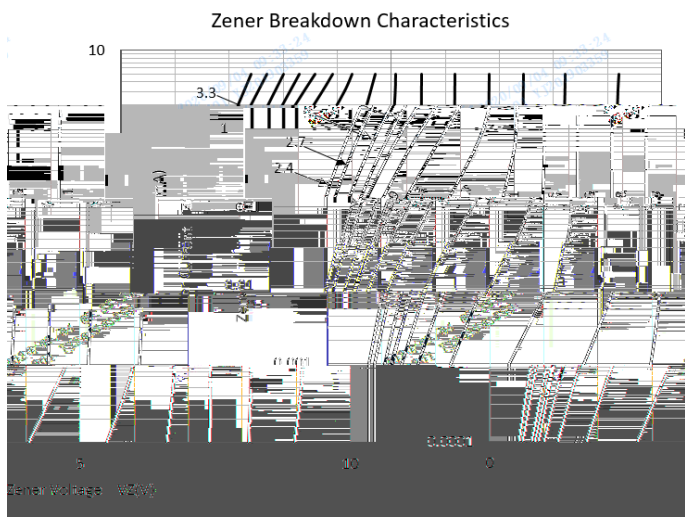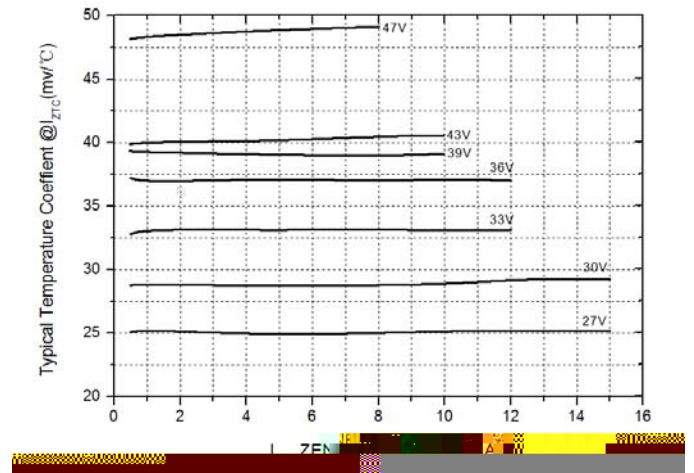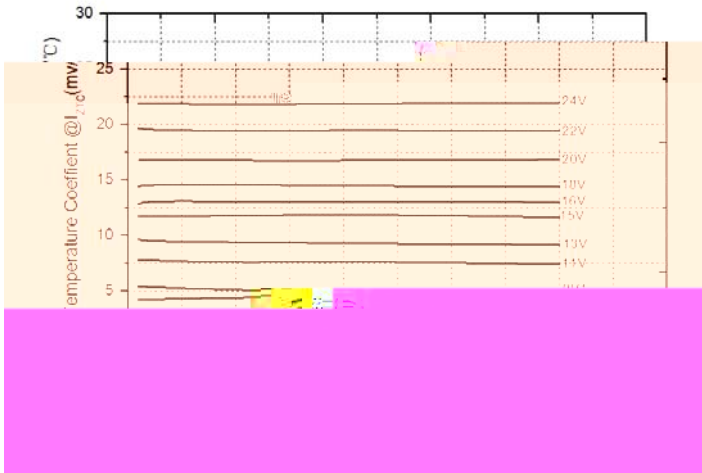




# BZX584C2V4 THRU BZX584C75V

## Outline Dimensions

SOD-523

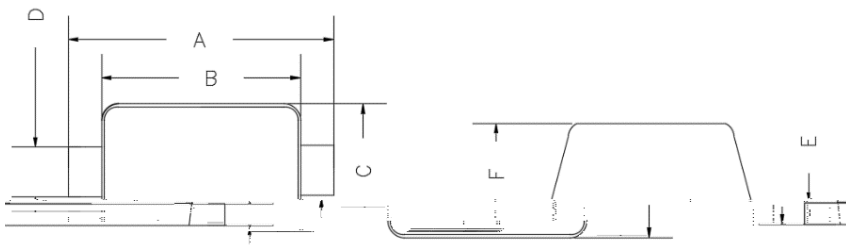


DE VIEW

TOP VIEW

SI

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.059	0.067	1.500	1.700
B	0.043	0.051	1.100	1.300
C	0.028	0.035	0.700	0.900
D	0.010	0.014	0.250	0.350
E	0.002	0.008	0.050	0.200
F	0.020	0.028	0.500	0.700

## Soldering Footprint

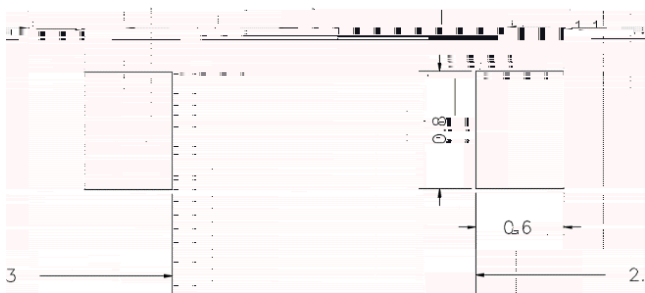

UNIT: mm

SOLDER PAD LAYOUT SUGGESTED



## **BZX584C2V4 THRU BZX584C75V**

---

**Disclaimer**

