



深圳市弗瑞鑫电子有限公司

规格承认书

—
————
————

| | | | |
|--|--|--|--|
| | | | |
| | | | |

| | |
|---------|--|
| prepare | |
| | |
| check | |
| | |
| approve | |
| | |



TRX电容一级代理商

深圳市弗瑞鑫电子有限公司

Add:深圳市宝安区西乡大道302号金源商务大厦B座3楼

Tel:0755-29563634

Fax:0755-27447020

2


2 . .


/

/

/

/


| | | | |
|---|------------|--|---|
|  | 2 2 . . | | |
| | / | | / |
| | / | | / |

| | | | |
|---|------------|--|---|
|  | 2 2 . . | | |
| | / | | / |
| | / | | / |

1. /

$\overline{\text{①}}$ $\overline{\text{②}}$ $\overline{\text{③}}$ $\overline{\text{④}}$ $\overline{\text{⑤}}$ $\overline{\text{⑥}}$

①

| | | | |
|---|------------|--|---|
|  | 2 2 . . | | |
| | / | | / |
| | / | | / |

3. /




4. /

| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

5. /




| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |

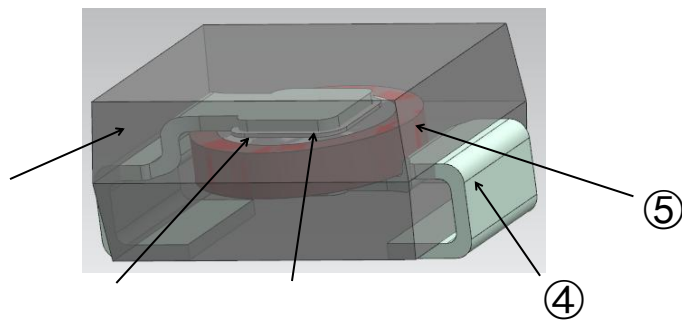

| | | |
|---|--|--|
| | | |
| ① | | |
| ② | | |
| ③ | | |
| ④ | | |
| ⑤ | | |

2
2 . .

/ /
/ /25

| | | | |
|---|------------|--|---|
|  | 2 2 . . | | |
| | / | | / |
| | / | | / |

/

°
°C

°


°

°


/

7.

/


| | | | |
|---|------------|--|---|
|  | 2 2 . . | | |
| | / | | / |
| | / | | / |




| | | | |
|---|-------|--|---|
|  TRX 专注电容器廿年 | 2 | | |
| | 2 . . | | |
| | / | | / |
| | / | | / |

| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |


8. /

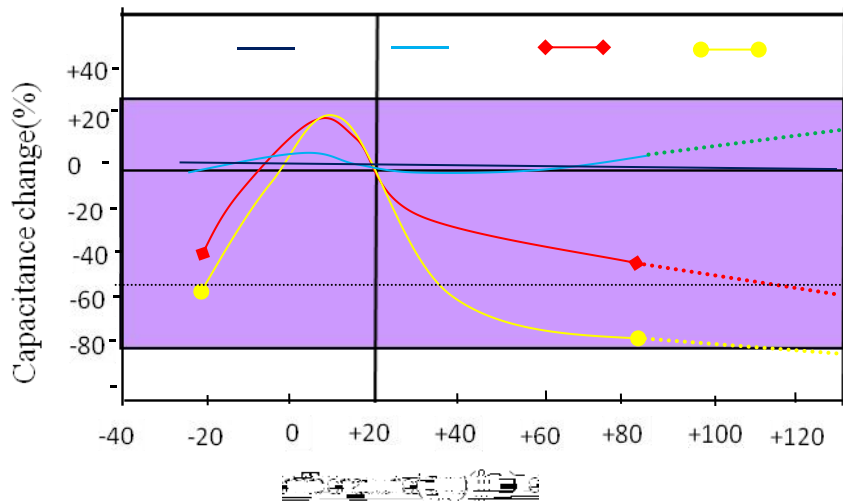


11. /
/

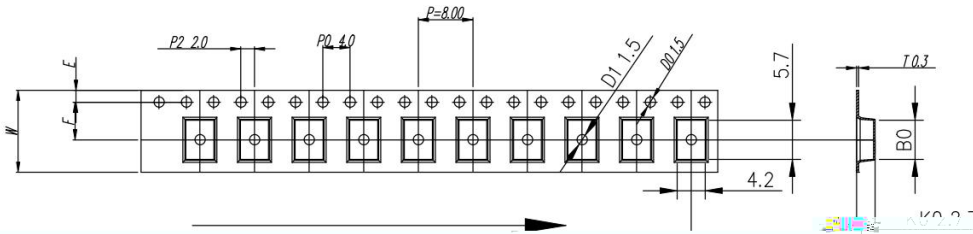


User Direction of Unreeling




| ITEM | W | A0 | B0 | K1 | K0 | P | F | E | D0 | D1 | P0 | P2 | T |
|-----------|------|----------------|-----------------|----|-----------------|-----------------|-----------------|------|---------------------|---------------------|----------------|----------------|-----------------|
| DIM | 12.0 | 4.7 ± 0.10 | 5.70 ± 0.10 | -- | 2.70 ± 0.10 | 8.00 ± 0.10 | 5.50 ± 0.10 | 1.75 | $\phi 1.5 \pm 0.10$ | $\phi 1.5 \pm 0.10$ | 4.0 ± 0.10 | 2.0 ± 0.10 | 0.30 ± 0.05 |
| ALTERNATE | | | | | | | | | | | | | |

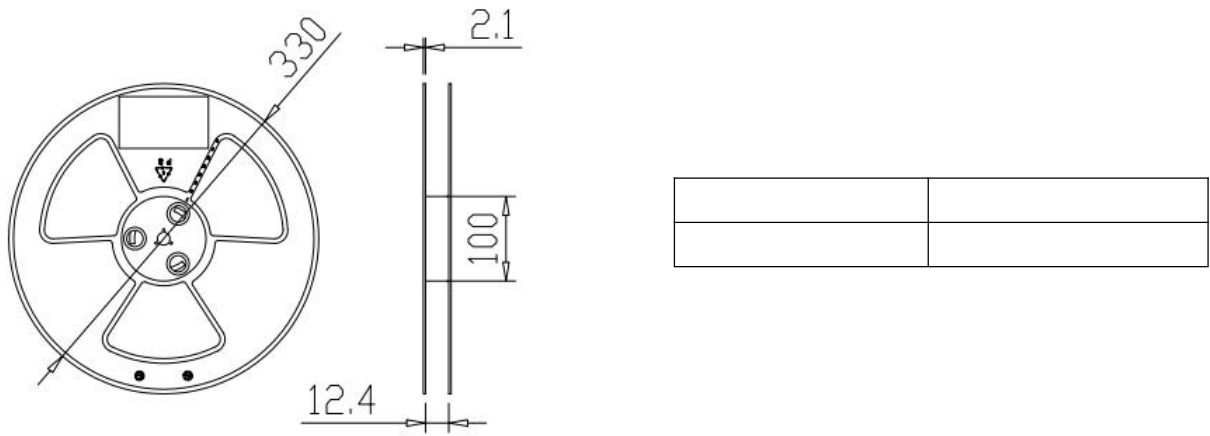


| Item | Data | Remark |
|---------------------|-----------|---|
| Cover tape adhesion | 10 ~ 100g | Carrier tape and cover tape open angle 165 ~ 180° F=300±5mm/minute |

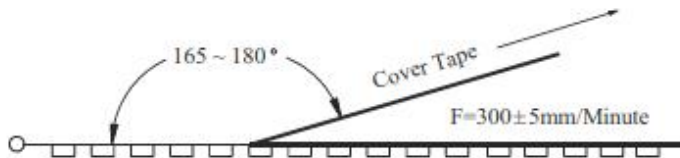


| | | | | |
|---|------------|--|---|--|
|  TRX 专注电容器廿年 | 2 2 . . | | | |
| | / | | / | |
| | / | | / | |

/ -





标签




料号

| | |
|--|--|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |







/ -





图示 /




图示 /




图示 /

| | | | |
|--|--|--|--|
| | | | |
| | | | |


/ :




/




/





| |
|--|
| |
|--|

| | | | |
|---|------------|--|---|
|  | 2 2 . . | | |
| | / | | / |
| | / | | / |

12. /

①

②