

FACE MO N CHO K BA IE EC IFIE	- 20 200 -5.0 A
DO-214AC/ MA	F C 94 -0 L F B - , L H H 250°C/10 M D : M : M 2026 , : P : A , 0.07 : 0.0023 , 0.07 MIL- D-750,
<p style="font-size: small;">Dimensions in inches and (millimeters)</p>	
25°C 20% 60H ,	
MBOLC	
M	20 40 60 80 100 150 200
M M	14 28 42 56 70 105 140
M DC	20 40 60 80 100 150 200
M =100°C	I 5.0 A
P , 8.3	I 120.0 A
M 5.0A	0.55 0.70 0.85 0.95
M DC =25°C DC =125°C	I 0.5 0.05 50 10 mA
	80.0 °C/
O	-55 +150 °C
	-55 +150 °C

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

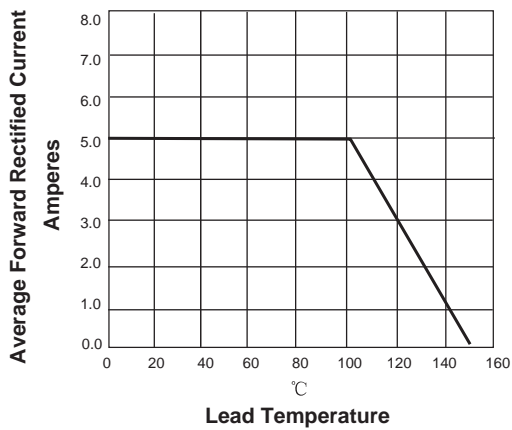


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

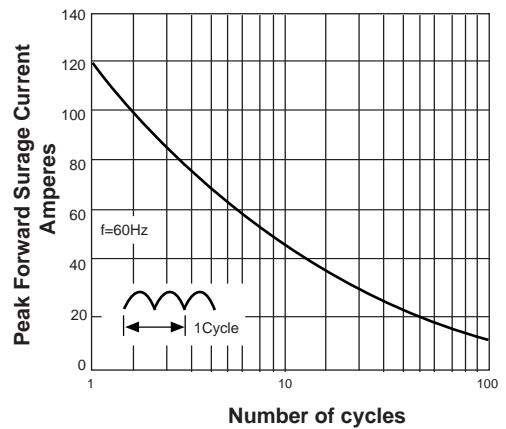


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

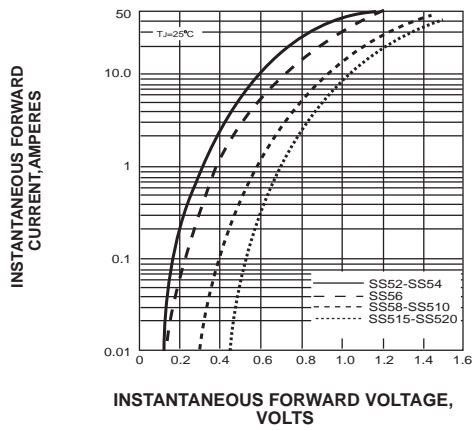


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

